

KUTR Reach-Ins

Reach-In Refrigerator with Solid Door

KUTR Reach-Ins

MODELS

KUTR1SS



KUTR1SS

STANDARD FEATURES

- Stainless-steel exterior front and sides.
- Complete stainless-steel interior with coved corner floors to meet NSF standards.
- “Ecomate” (GWP) (ODP) insulation, 2-3/8” thick.
- In step door design and full-length handle.
- One-piece magnetic door gasket, removable without tools.
- Zamak hinges for a durable long-lasting door.
- Field reversible door.
- Door locks with universal key.
- R-290 Hydrocarbon, to meet DOE’s Energy Conservation standards with very low contribution to global warming (ODP-0) (GWP-3).
- Hermetic compressor, self-contained refrigeration with epoxy coated evaporator.
- Automatic evaporator: Paper fins not utilized in the evaporation process.
- Electronic controller with digital display.
- Accepts 18” x 26” sheet pans.
- Standard with 5” castors, front with brakes.
- Units with LED lighting.
- Meets the NSF-7 standard for food safety.

ELECTRIC

- 115V / 60Hz / 1Ph
- NEMA 5-15P
- Cord Length: 10 ft.

TEMPERATURE

- 32 °F to 38 °F based on an external environment of 90 °F and 65% RH.



KUTR Reach-Ins


Reach-In Refrigerator with Solid Door

KUTR Reach-Ins


MODELS

KUTR1SS


KUTR1SS FRONT

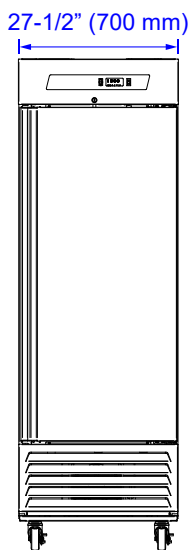

KUTR1SS TOP



KUTR1SS SIDE

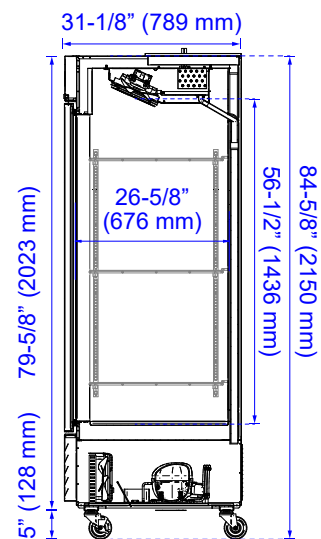

MODEL	KUTR1SS
Full Amp. Loads	2.2
Compressor HP	1/4
Refrigerant	R-290
# of Doors	1
Volume (cu. ft.)	23
Ext. Width Overall	27 5/8"
Ext. Depth Overall ²	31 1/4"
Ext. Height Overall	80"
Int. Width Overall	23 1/8"
Int. Depth Overall	26 1/2"
Int. Height Overall	56 1/4"
# of Shelves - Std.	3
Shelf Size (L x D)	24 5/8" x 22 1/2"
Shipping Weight (lbs.)	295

TECHNICAL DATA

Height does not include castors.
Depth includes door handle.

